


Semi-Auto Carton Folding Sealer

1. When operator feeds the carton into the machine, the machine will fold the carton's front flap, rear flap and side flaps automatically then proceed to tape the carton and send out the carton.
2. Two sides belt driven for folding carton sealer.
3. The height and the width of the carton can be adjusted by crank handle, easy adjustment.
4. This machine is suitable for few carton size simplicity production line.

TECHNICAL DATA

CHS-6605S

Model	CHS-6605S
Function	SIDE DRIVE
Power Supply	1 Phase 240V / 3 Phase 415V
Tape Width	2" or 3" (according to customer need)
2" Standard Carton Dimension	L=150~550mm, W=130~500mm, H=120~500mm
3" Standard Carton Dimension	L=150~550mm, W=150~500mm, H=120~500mm
Working Table Height	570~770mm
Convey Speed	20 M/min
Max. Conveyor Loading Weight	20Kg
Machine Dimension	1900mmL x 960mmW x 1600mmH
Air Compressor	6 KG/cm ²

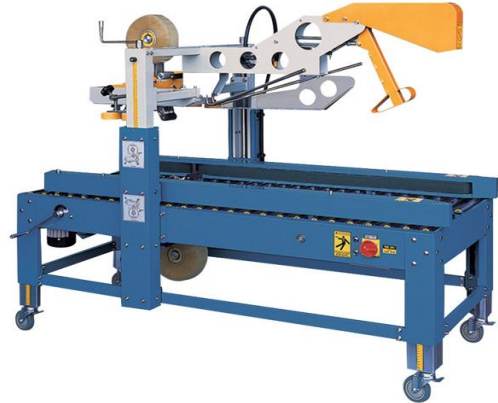

177229-T

高雄贸易有限公司

KAOH SIUNG TRADING SDN. BHD.

10, Jalan Rajawali 3, Bandar Puchong Jaya, 47100 Puchong, Selangor. Malaysia.

Tel: +603-80757011/2/3/4

Fax: +603-80757015

E-mail: sales@kaohsiung.com.my / sales@kst.com.my Web: www.kaohsiung.com.my